




PV

Conductive polymer solid aluminum electrolytic capacitor (standard product)- SMD type

Features

- Use for surface mounted type.
- The product can support lead free-reflow .
- RoHS Adapted to the RoHS directive.

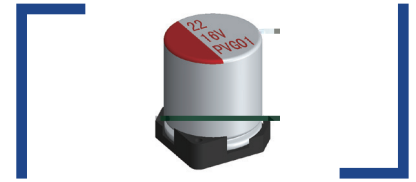


Specifications

Items	Characteristics					
Operating Temperature Range	-55- +105					
Rated Voltage Range	2.5- 25V					
Nominal Capacitance Range	22- 2700μF					
Nominal Capacitance Tolerance	± 20% 20 120Hz					
Leakage Current	Reference parameter table at 20 , after 2 minutes					
t_g Dissipation Factor (Max)	20 , 120Hz		5	6.3(L > 7)	6.3 (L > 7)	8- 10
		t_g	0.10	0.10	0.08	0.08
ESR	Reference parameter table (m at 100k- 300kHz 20 max)					
Characteristics of impedance ratio at high temp. and low temp.	100KHZ 20	-55	Z/Z20	0.75 to 1.25		
	Based the value at 100KHZ. +20	+105	Z/Z20	0.75 to 1.25		
Load Life	+105 2000 20 After 2000 hours' application of rated voltage at 105 , and then being stabilized at +20 , the capacitors shall meet the following requirement					
	Capacitance Change	± 20% Within ± 20% of the initial value (16V: within ± 25% of the initial value)				
	Dissipation Factor	150% Not more than 150% of the initial specified value				
	Equivalent Series Resistance	150% Not more than 150% of the initial specified value				
	Leakage Current	Not more than the initial specified value				
Damp heat(Steady state)	60 , 90- 95% RH, 1000 60 , 90- 95% RH, 1000 hours, No-applied voltage.					
	Capacitance Change	± 20% Within ± 20% of the initial value (16V: within ± 25% of the initial value)				
	Dissipation Factor	150% Not more than 150% of the initial specified value				
	Equivalent Series Resistance	150% Not more than 150% of the initial specified value				
	Leakage Current	Not more than the initial specified value				
Resistance to Soldering Heat	VPS (260 X 10s)					
	Capacitance Change	± 10% Within ± 10% of the initial value (16V : within ± 15% of the initial value)				
	Dissipation Factor	Not more than the initial specified value				
	Equivalent Series Resistance	Not more than the initial specified value				
	Leakage Current	Not more than the initial specified value				

: 125 120

When in doubt, apply the following voltage treatment and measure.
Voltage processing: under the condition of 125 ambient temperature, continuous load voltage of 120 minutes. Load voltage is rated voltage.

Dimensions



Size List

	5×5.8	6.3×5.8	6.3×7.7	8×10.5	8×12.5	10×10.5	10×12.5
A	2.1	2.4	2.4	2.9	2.9	3.2	3.2
B	5.3	6.6	6.6	8.3	8.3	10.3	10.3
C	5.3	6.6	6.6	8.3	8.3	10.3	10.3
E	1.3	2.2	2.2	3.1	3.1	4.5	4.5
L	5.8	5.8	7.7	10.5	12.5	10.5	12.5
H	0.5- 0.8			0.8- 1.1			

Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

Rated Volt. (V)	Capacitance (uF)	Size D×L(mm)	Tan 120HZ,20	LC μA	ESR (m /at 100k- 300kHz 20 max)	Rated R. C. (mA/rms at 100kHz 105)
2.5	180	5×5.8	0.1	300	30	2100
	220	6.3×5.8	0.1	300	25	2500
	270	6.3×5.8	0.1	300	25	2500
	330	6.3×5.8	0.1	300	25	2700
	390	6.3×5.8	0.1	300	25	2700
	470	6.3×7.7	0.1	300	20	3700
	560	6.3×7.7	0.1	300	20	3700
	680	8×10.5	0.08	340	15	4100
	820	8×10.5	0.08	410	15	4100
	1000	8×10.5	0.08	500	15	4100
	1200	8×12.5	0.08	600	12	4300
	1500	8×12.5	0.08	750	12	4300
	2200	10×10.5	0.08	1100	12	4700
	2700	10×12.5	0.08	1350	12	4700
4	100	5×5.8	0.1	300	30	1800
	150	5×5.8	0.1	300	30	1800
	220	6.3×5.8	0.1	300	25	2500
	270	6.3×5.8	0.1	300	25	2500
	330	6.3×5.8	0.1	300	25	2600
	390	6.3×5.8	0.1	312	25	2600
	470	6.3×7.7	0.1	376	20	3100
	560	6.3×7.7	0.1	448	20	3100
	680	8×10.5	0.08	544	15	4100
	820	8×10.5	0.08	656	15	4100
	1000	8×10.5	0.08	800	15	4100
	1200	8×12.5	0.08	960	12	4700
	1500	8×12.5	0.08	1200	12	4700
	2200	10×10.5	0.08	1760	12	5400
2700	10×12.5	0.08	2160	12	5400	
6.3	100	5×5.8	0.1	300	30	1500
	100	6.3×5.8	0.1	300	25	2400
	120	5×5.8	0.1	300	30	1500
	120	6.3×7.7	0.1	300	20	2600
	150	6.3×5.8	0.1	300	25	2400
	220	6.3×5.8	0.1	300	25	2400
	220	6.3×7.7	0.1	300	20	2600
	330	6.3×7.7	0.1	415	20	2600
	470	6.3×7.7	0.1	592	20	2600
	680	8×10.5	0.08	856	15	4100
	820	8×10.5	0.08	1033	15	4100
	1000	8×10.5	0.08	1260	15	4100
	1200	8×12.5	0.08	1512	12	4700



Rated Volt. (V)	Capacitance (µF)	Size D×L(mm)	Tan 120HZ,20	LC µA	ESR (m /at 100k-300kHz 20 max)	Rated R. C. (mA/rms at 100kHz 105)
6.3	1500	8×12.5	0.08	1890	12	4700
	2200	10×10.5	0.08	2772	12	5400
	2700	10×12.5	0.08	3400	12	5400
10	47	5×5.8	0.1	300	40	1300
	56	5×5.8	0.1	300	40	1300
	56	6.3×5.8	0.1	300	30	2100
	68	6.3×5.8	0.1	300	30	2100
	120	6.3×5.8	0.1	300	30	2100
	150	6.3×7.7	0.1	300	25	2500
	220	6.3×7.7	0.1	440	25	2500
	270	6.3×7.7	0.1	540	25	2500
	470	8×10.5	0.08	940	20	3700
	560	8×10.5	0.08	1120	20	3700
	680	8×10.5	0.08	1360	20	3700
	820	8×12.5	0.08	1640	15	4300
	1000	8×12.5	0.08	2000	15	4300
	1200	10×10.5	0.08	2400	15	5200
	1500	10×12.5	0.08	3000	15	5200
16	22	5×5.8	0.1	300	45	1200
	33	5×5.8	0.1	300	45	1200
	39	5×5.8	0.1	300	45	1200
	39	6.3×5.8	0.1	300	40	1600
	47	6.3×5.8	0.1	300	40	1600
	68	6.3×5.8	0.1	300	40	1600
	82	6.3×5.8	0.1	300	40	1600
	100	6.3×5.8	0.1	320	40	1600
	100	6.3×7.7	0.1	320	35	2300
	150	6.3×7.7	0.1	480	35	2300
	330	8×10.5	0.08	1056	30	3700
	470	8×10.5	0.08	1504	30	3700
	560	8×10.5	0.08	1792	30	3700
	680	8×12.5	0.08	2176	25	4100
	820	10×10.5	0.08	2624	25	5100
1000	10×12.5	0.08	3200	20	5100	
20	22	6.3×5.8	0.1	300	50	1600
	47	6.3×5.8	0.1	300	50	1600
	56	6.3×5.8	0.1	300	50	1600
	100	6.3×7.7	0.1	400	45	1800
	120	6.3×7.7	0.1	480	45	1800
	220	8×10.5	0.08	880	30	3100
	270	8×10.5	0.08	1080	30	3100
	330	8×10.5	0.08	1320	30	3100
	390	8×10.5	0.08	1560	30	3100
	470	8×12.5	0.08	1880	25	3700
	680	10×10.5	0.08	2720	25	4300
	820	10×12.5	0.08	3280	25	4300
25	47	6.3×5.8	0.1	300	60	1200
	56	6.3×5.8	0.1	300	60	1200
	56	6.3×7.7	0.1	300	50	1500
	82	6.3×7.7	0.1	410	50	1500
	150	8×10.5	0.08	750	35	2900
	220	8×10.5	0.08	1100	35	2900
	270	8×12.5	0.08	1350	30	3100
	330	10×10.5	0.08	1650	30	3800
	470	10×12.5	0.08	2350	30	3800